


NOW AVAILABLE!

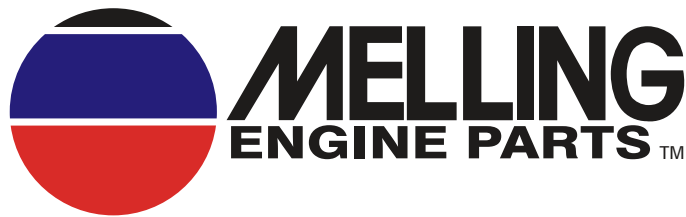

ANNOUNCES

NEW MDS DELETE KIT FOR GM 5.3L L82, L83 & L8B ENGINES

CHEVROLET	5.3-C,F	(325)	OHV	2014-20	Silverado 1500
CHEVROLET	5.3-C	(325)	OHV	2015-20	Suburban
CHEVROLET	5.3-C	(325)	OHV	2015-20	Tahoe
GMC	5.3-C,F,R	(325)	OHV	2014-20	Sierra 1500
GMC	5.3-C	(325)	OHV	2015-20	Yukon
GMC	5.3-C	(325)	OHV	2015-20	Yukon XL

Important MDS Delete Kit Notes

- When installing a delete cam, the Active Fuel Management lifters must be replaced using Non-Active Fuel Management lifters.
- The valve lifter guides used in Non-Active Fuel Management engines are different from those used in Active Fuel Management Engines and must be replaced when installing the Non-Active Fuel Management lifters
- The VLOM Must Be Replaced With A Non-Active Fuel Management Valley Cover.
- Pushrod length must be checked during installation to verify that the correct length pushrods are being used
- The vehicle engine control module/Power train control module must be reprogrammed to turn off the Active Fuel Management System in the operating software



Components must be used together

Component #	Description	Qty
MC1429	Camshaft	1 Camshaft
JB-2079	Valve Lifter	16 Lifters
MLG100	Lifter Guide	4 Guides
MF127	Thrust Plate	1 Thrust Plate
VCTO-1001	VVT Oil Control Valve	1 Valve

Part number

MDK400

UPC: 729295152002

**** Always consult catalog listings for detailed application information****

Melling Engine Parts

P.O. Box 1188 • Jackson, MI 49204 • www.melling.com