


# MELLING™

## PERFORMANCE

**NEW HIGH PERFORMANCE GM LS CAMSHAFTS**  
FOR GEN 3 AND GEN 4 ENGINES

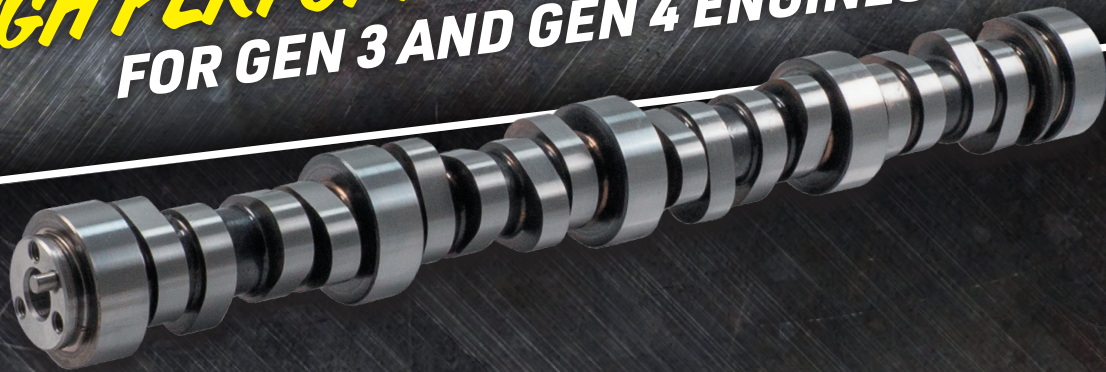

### **PART# 22307**

#### **CLASS 3 HYDRAULIC ROLLER PERFORMANCE CAMSHAFT**

- RPM Range: Idle - 5000
- Non AFM
- 3 Bolt Non VVT
- 112° Lobe Separation
- 0.523" Intake Valve Lift
- 0.524" Exhaust Valve Lift
- Intake Duration @ .050 Inch Lift 218°
- Exhaust Duration @ .050 Inch Lift 227°

### **PART# 22411**

#### **CLASS 4 HYDRAULIC ROLLER PERFORMANCE CAMSHAFT**

- RPM Range: 2000 - 6000
- For Non AFM Engines
- 3 Bolt Non VVT
- 110° Lobe Separation
- 0.525" Intake Valve Lift
- 0.525" Exhaust Valve Lift
- Intake Duration @ .050 Inch Lift 225°
- Exhaust Duration @ .050 Inch Lift 236°

### **PART# 22412**

#### **CLASS 4 HYDRAULIC ROLLER PERFORMANCE CAMSHAFT**

- RPM Range: 2000 - 6500
- Non AFM
- 3 Bolt Non VVT
- 110° Lobe Separation
- 0.612" Intake Valve Lift
- 0.612" Exhaust Valve Lift
- Intake Duration @ .050 Inch Lift 236°
- Exhaust Duration @ .050 Inch Lift 246°

### **PART# 22413**

#### **CLASS 4 HYDRAULIC ROLLER PERFORMANCE CAMSHAFT**

- RPM Range: 2000 - 6000
- Non AFM
- 3 Bolt Non VVT
- 108° Lobe Separation
- 0.551" Intake Valve Lift
- 0.551" Exhaust Valve Lift
- Intake Duration @ .050 Inch Lift 229°
- Exhaust Duration @ .050 Inch Lift 240°

### **PART# 22500**

#### **CLASS 5 HYDRAULIC ROLLER PERFORMANCE CAMSHAFT**

- RPM Range: 2000 - 6000
- Non AFM
- 3 Bolt Non VVT
- 107° Lobe Separation
- 0.595" Intake Valve Lift
- 0.595" Exhaust Valve Lift
- Intake Duration @ .050 Inch Lift 234°
- Exhaust Duration @ .050 Inch Lift 277°

Visit  
[melling.com/category/performance](http://melling.com/category/performance)  
to view all of our product  
announcements!

